




MADE IN USA

BITUTAK-COM Smooth is an APP Modified Bitumen Roofing Membrane. The product is designed to be torch applied or installed using a cold process adhesive. BITUTAK-COM Smooth is manufactured from specially selected roofing grade asphalts that are blended with APP (atactic polypropylene) polymers in a unique process that enhances the weathering performance characteristics of asphalts. BITUTAK-COM Smooth is reinforced with a heat resistant non-woven polyester mat with glass strands which provides the strength and durability necessary in a roofing membrane. BITUTAK-COM Smooth adapts well to the use of aluminum or other fine coatings.

BITUTAK-COM Smooth
Product Composition

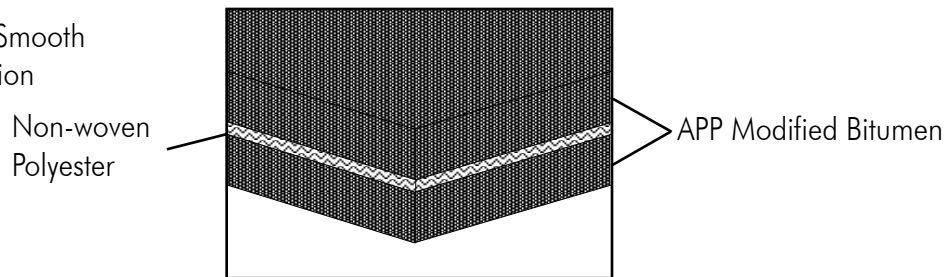

BITUTAK-COM Smooth
Product Characteristics*

ASTM 6222

Length	33.5 ft	10.21 m
Width	39.4 in	1.00 m
Thickness	134 mils	3.4 mm
Coverage	100 sq ft	9.29 m ²
Reinforcement		
- Non-woven polyester	grams / sq m	190

*All values shown are nominal and subject to normal manufacturing tolerances.

BITUTAK FIRE SAFETY GUIDELINES

Note: Torch application of BITUTAK-COM Smooth may pose a threat of fire if strict application standards and procedures are not followed. All operators of torch equipment should be thoroughly trained. In addition a fire watch should be maintained on the project for not less than 60 minutes following the last heat welded work of the day. An ABC approved fire extinguisher should be on the site for each torch in operation.